




4D BATTERY QUICKPUMP™ Instructions


Scanned + Archived
By:
FindMyManual.org

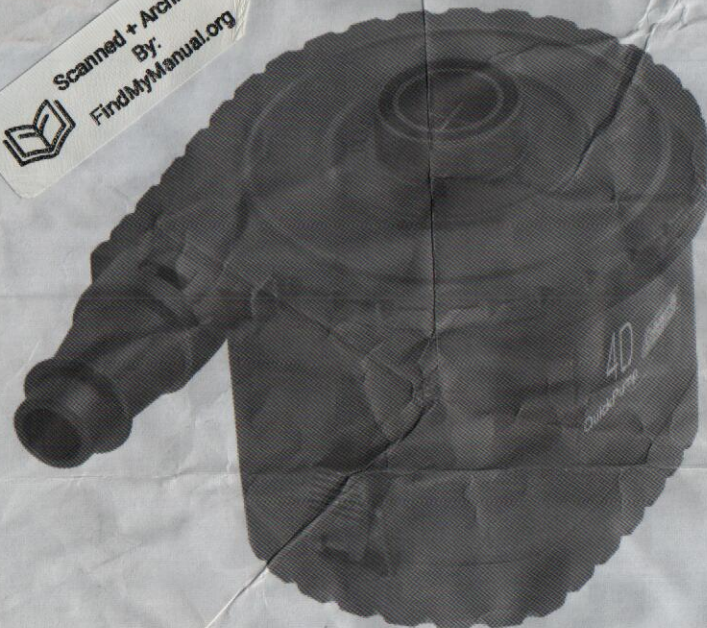


- Inflates AND deflates.
- Adaptor works with Coleman® Double Lock™ Valve as well as other airbed valves on the market.
- Operates on four D-cell batteries.

- Always purchase the correct size and grade of battery most suitable for the intended use.
- Replace all batteries of a set at the same time.
- Ensure the batteries are installed correctly with regard to polarity (+ and -). (see Fig. 1)
- Remove batteries from equipment which is not to be used for an extended period of time.
- Remove used batteries promptly.

TO INSERT/REPLACE BATTERIES

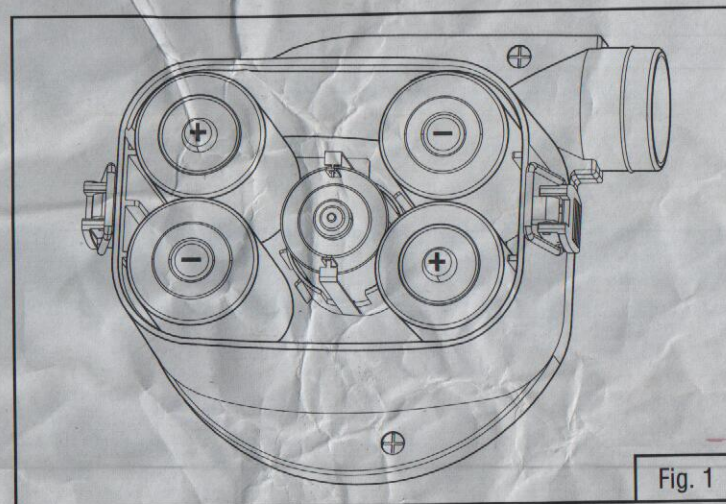

- Make sure pump power switch is "OFF".
- Remove battery cover.
- Install 4D cell batteries following the + and - symbols as shown (see Fig. 1) and as marked inside the pump housing.
- Replace battery cover making sure it is rotated so the + and - symbols marked inside the cover match the + and - symbols on the batteries.
- Do not mix old and new batteries.
- Do not mix battery types.




Please call or write us with any comments or questions:

The Coleman Company, Inc.
3600 North Hydraulic • Wichita, KS 67219 U.S.A.
1 800 835-3278 • TDD: 1 316 832-8707

www.coleman.com
Manufactured in China

Coleman®, and are registered trademarks and QuickPump™ and Double Lock™ are trademarks of The Coleman Company, Inc.


INFLATING COLEMAN® DOUBLE LOCK™ VALVE:




To begin inflation, open external cap and pull firmly on lanyard to extend out. This will open internal yellow seal.



Attach adapter nozzle to inflation end of pump. Insert pump and turn on.



When fully inflated, seal valve by pushing in with pump nozzle. This will seal the internal yellow stopper and keep air from escaping while closing cap.



Fully remove pump and close external cap. Valve should appear depressed into itself.

DEFLATION



Remove adapter nozzle from inflation end and attach to deflation side of pump. Repeat same steps as inflation. This will draw the air out quickly.

OTHER VALVES:

WORKS WITH STANDARD WIDE OPENING AND BOSTON STYLE VALVES.

Note: For optimum performance, alkaline batteries are recommended.