

a recording: Press 1 to program your Home Phone Connect. When programming is complete, hang up. Your Home Phone Connect is now programmed.

Customer Transferring their Current Number


Dial *228 on the telephone connected to your Home Phone Connect. You will hear a recording: Press 1 to program your Home Phone Connect. When programming is complete, hang up. Your Home Phone Connect is now programmed.

NOTE: Customers transferring in their home number will not be able to receive calls on the Home Phone Connect device until the transfer process is completed. The transfer process can take 2-10 business days. To make and receive calls, the home telephone should be connected directly to the wall jack, until the transfer process is completed. To check the status of your port, call 877-567-4899 from another phone.

STEP 7: UNDERSTANDING THE INDICATORS

The table below describes a possible status for each of the device indicators:

Icon	Indicator	Status
Voicemail 	Blinking Blue	New Message
Battery 	Blue	Full Charge
	Blinking Blue	Partial Charge
	Blinking Red	Low Charge
	Solid Red	No Battery Charge
Signal Strength 	All Blinking in Blue	International Roaming
	Three Blue	Strong Signal
	Two Blue	Moderate Signal
	One Blue	Weak Signal
Power	Blue	The device is on

Software update 	Blinking Blue from Left to Right	The software is being updated
--	-------------------------------------	----------------------------------

STEP 8: MAKING CALLS

IMPORTANT

- Your Verizon Wireless Home Phone Connect may require 10-digit dialing in most areas. Customers may need to use the three-digit Area Code when dialing local and long distance numbers.
 - Your Verizon Wireless Home Phone Connect does not support rotary or pulse dialing phones.
- Before making a call, make sure at least one of the signal strength indicators () is lit up.
 - Place a call by entering the desired telephone number, including area code.
 - When your call is complete, hang up or return the phone to the receiver to ensure that you can receive calls.

RECEIVING CALLS

- For customers with a new telephone number, simply share your new number with friends & family. When they call, answer the phone connected to your Home Phone Connect device.
- For customers that are transferring their current home number to the Home Phone Connect, do not disconnect your existing home phone from the wall jack during the transfer process.
- Incoming calls will continue to ring on your existing home phone until the transfer is complete.
- The transfer process may take 2 to 10 business days to complete.

IMPORTANT

The Home Phone Connect Adaptor has a backup battery. However, if the landline device connected to your Home Phone Connect device requires external power to

operate, service will not be available during a power outage. Other data services, including personal safety monitors.

Fax Machine Compatibility

- Your Verizon Wireless Home Phone Connect does not support incoming or outgoing fax service.

Home Security Systems

- Your Verizon Wireless Home Phone Connect may not be compatible with certain Home Security systems. Please check with your security system provider to confirm the compatibility requirements of your Home Security system.

Other Incompatibilities

- Additional incompatibilities for the Home Phone Connect device include:
 - Sending or Receiving Collect Calls
 - DSL or Dial up Internet Service
 - DVR, Dish Network, and DirecTV
 - Medical or Life Alert Dependencies
 - Any type of PBX or Centex System
 - Mobile Merchant Machines (credit card machines)

911 Calls

- Since the Home Phone Connect Adaptor is designed for an indoor environment, please be prepared to provide your location inside the premises to public service personnel. The GPS chipset embedded in this device will work best if the device is located near a window or other opening.

Please refer to the User Manual for more details.



Start Here

©2011 Verizon Wireless. All Rights Reserved.
verizonwireless.com


**VERIZON WIRELESS
HOME PHONE CONNECT**



APPEARANCE

NOTE: The figures are only for your reference, the actual shape and color of the product may differ slightly.


TOP VIEW



NO.	ITEM	NO.	ITEM
1	DC 12V power port	6	Power indicator
2	Telephone port 1	7	Voice mail indicator
3	Telephone port 2	8	Battery indicator
4	USB port*	9	Signal strength indicators
5	Antenna port	10	Power On/Off switch

*NOTE: Never place a USB-based device into the USB port of the Home Phone Connect under any circumstances. Doing so may damage the device and negate its warranty. The port was designed for diagnostic purposes only; it is not intended for customer use.

BOTTOM VIEW

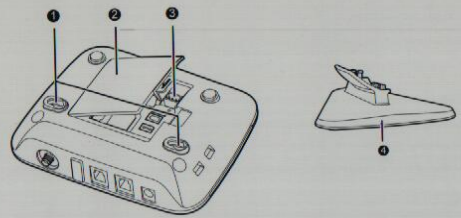

NO.	ITEM	NO.	ITEM
1	Wall-mounting brackets	3	Battery port
2	Battery cover	4	Desktop stand

STEP 1: INSTALLING THE BATTERY

NOTE: The battery is intended for backup purposes only (in the event of a power failure). The device takes approximately 3.5 hours to charge fully. The charge time may be impacted by environmental factors. Talk time is approximately 2 hours and standby time is approximately 36 hours. Actual values will vary with network environment.


Remove the battery cover. Carefully insert the battery connection cable into the battery port. The connection cable will click into place when correctly inserted. Place the battery in the battery slot and return the battery cover.



GETTING STARTED

STEP 2: INSTALLING THE ANTENNA


Make sure the device is turned Off. Align the antenna with the antenna port on the device as illustrated below. Screw the antenna into the port, ensuring that the connection is secure.



STEP 3: INSTALLING THE POWER ADAPTER

Under normal usage, the device relies on the external power adapter for its power supply. Insert one end of the power adapter into the DC input port, and plug the unit into an AC wall outlet.

NOTE: Backup battery power will only be used during power failure or if the external power adapter is not in use.




STEP 4: CONNECTING YOUR TELEPHONE TO HOME PHONE CONNECT


The Home Phone Connect device provides ports for up to two telephones. The ports use the same telephone number.

First, unplug your telephone from your wall's telephone jack.

Second, plug the end of your telephone's cord into one of the telephone ports (the other end of the cord must remain plugged into the back of your home telephone base unit).

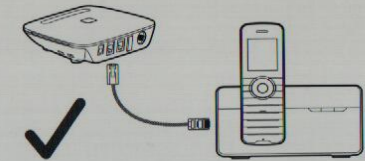

Warning: Do not plug Home Phone Connect into your telephone wall jack.



NOTE: The telephone and telephone cord are not included. Customer must provide own telephone and telephone cord.

STEP 5: POWERING ON THE DEVICE

Press the  button to power on the device. When the device is on, the power indicator will be blue.

STEP 6: ACTIVATING YOUR DEVICE

If your device has not yet been activated, please follow the steps below:

Customer Activating New Number

Dial *228 on the telephone connected to your Home Phone Connect. You will hear