



ANTA MK12

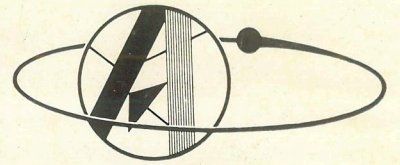


OPERATING INSTRUCTIONS



Sumlock Comptometer Ltd

39 ST. JAMES'S STREET LONDON S.W.1

Telephone: Hyde Park 1331 & 1532

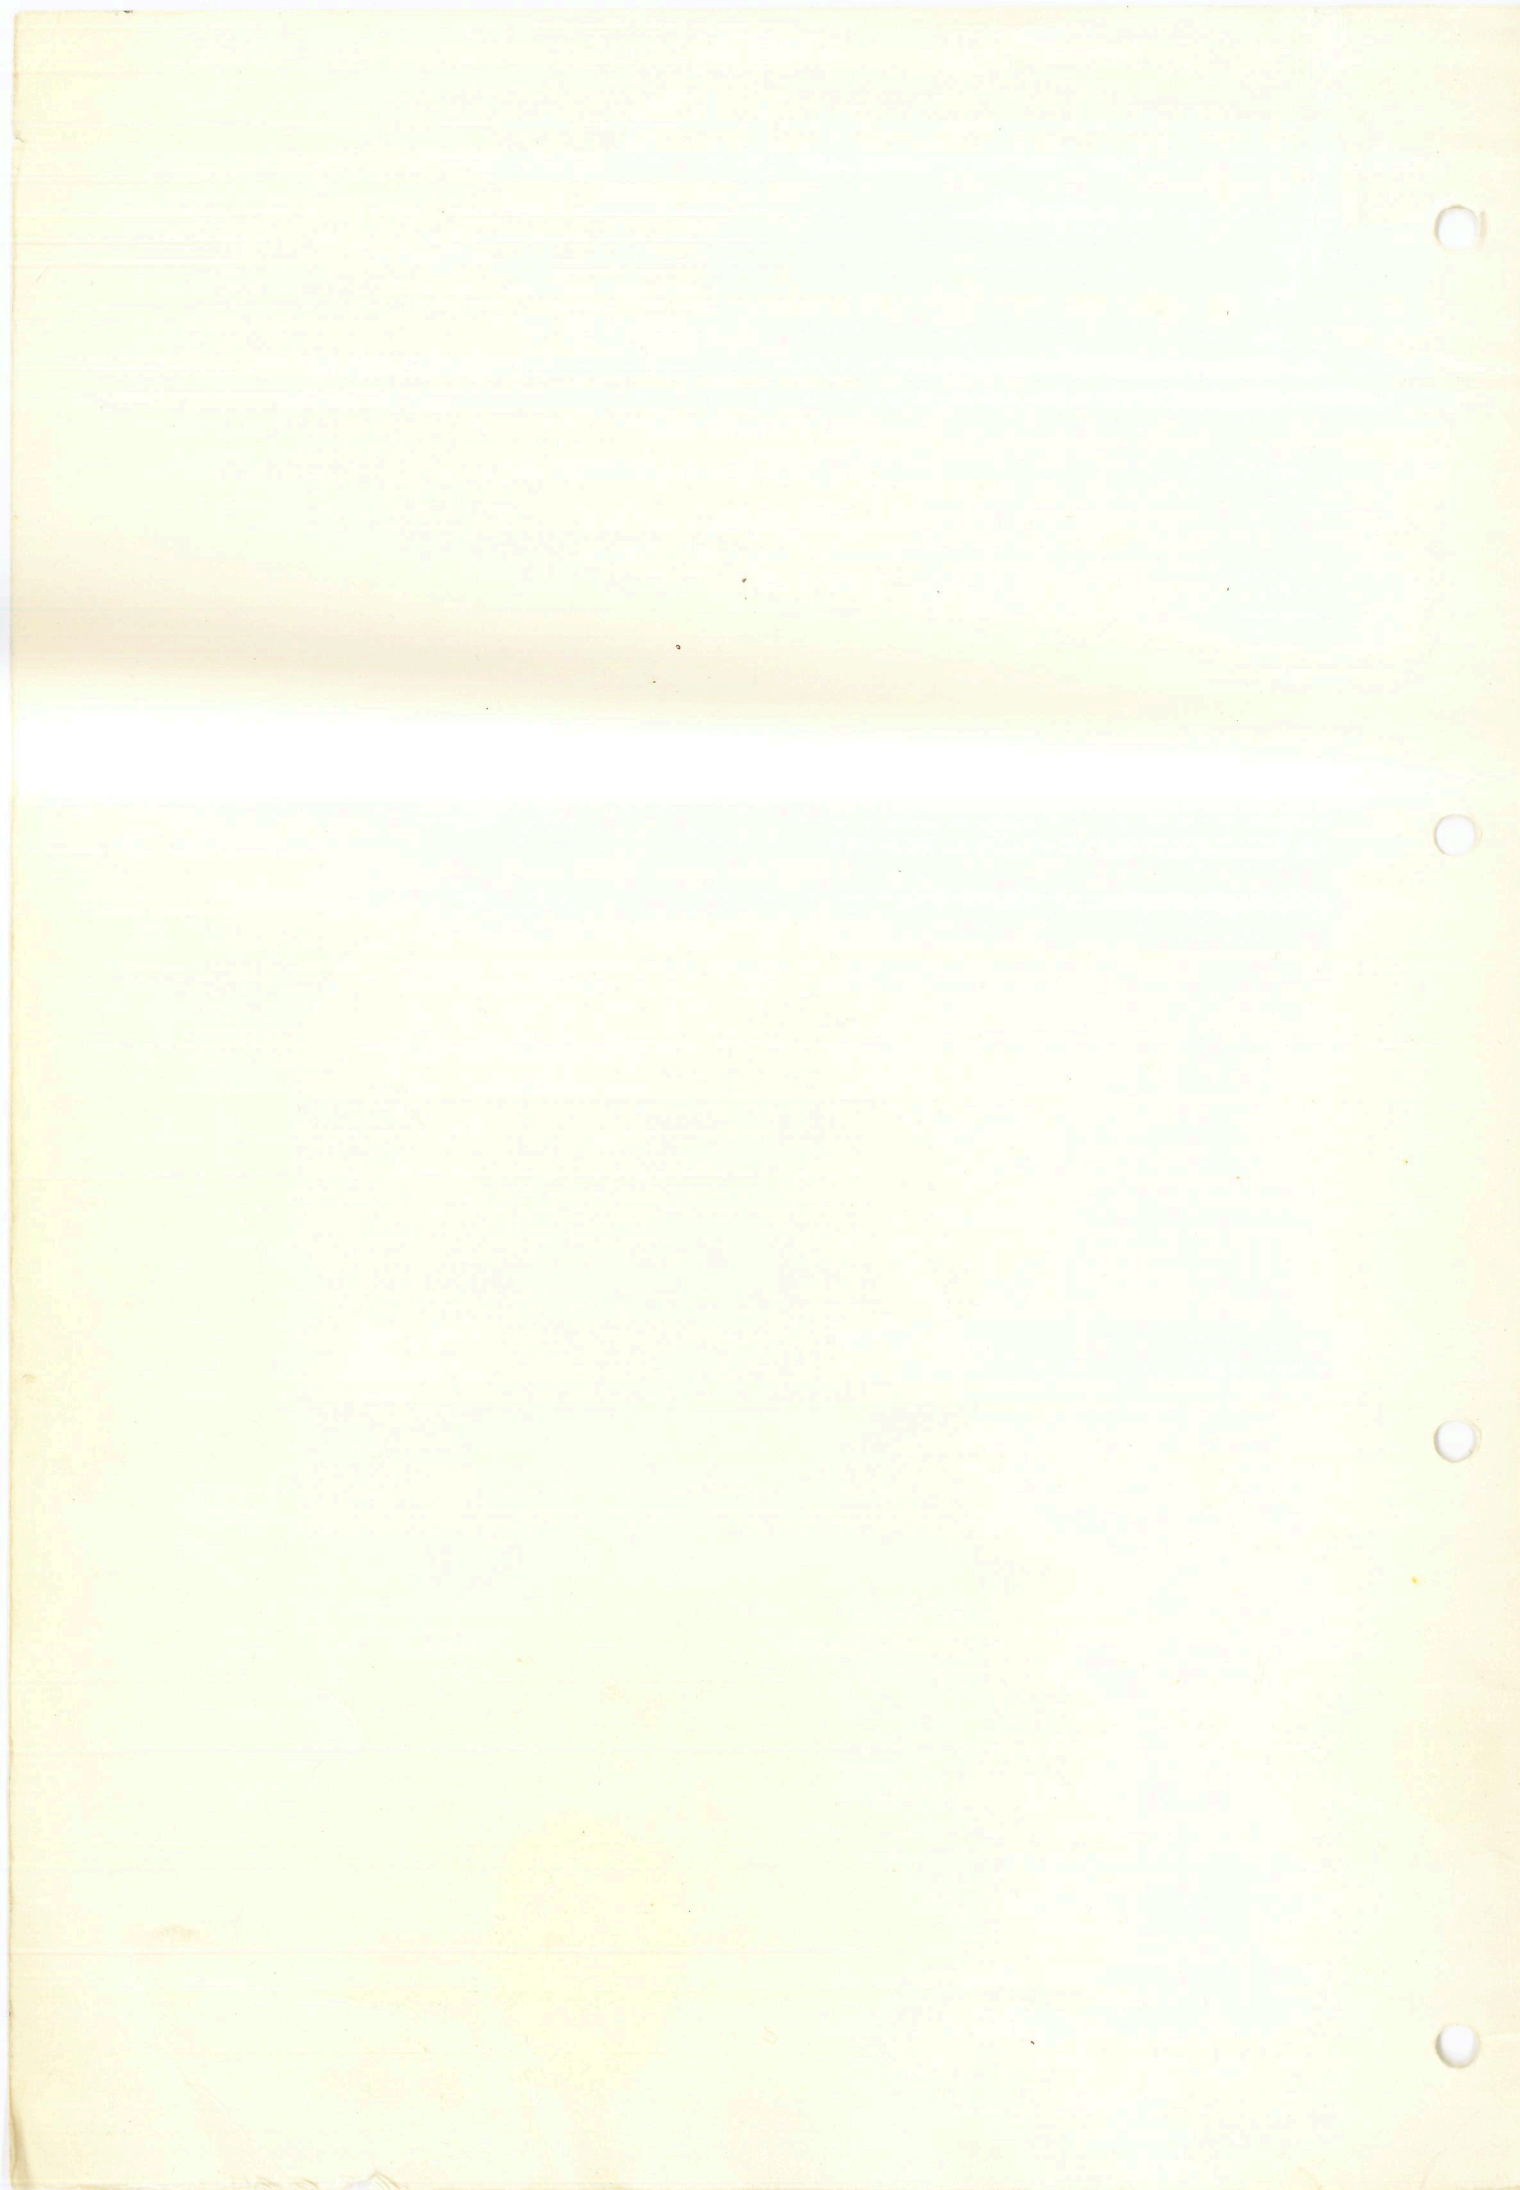

ANITA MK. 12

OPERATING INSTRUCTIONS

INDEX

NOTE NO.	DESCRIPTION	PAGE NO.
	Control Key Functions	3
1	Multiplication	4
2	Division	5
3	Checking and Recalling	6
4	Constants: (a) Constant Multiplier	7
	(b) Constant Divisor	8
	(c) Constant Dividend	9
5	Addition and Subtraction	10
6	Accumulation (a) Products	14
	(b) Negative Multiplication	15
	(c) Quotients—positively and negatively	17
7	Combined Functions (a) Division followed by Multiplication	19
	(b) Multiplication followed by Division	20
	(c) Division followed by Division	21
	(d) Addition followed by Division	22
8	Invoicing (a) Discounts and Increments	23
	(b) Invoice Example	24
9	The Ring Decimal Point System	26
10	Accumulation and Constant Factor Combined	
	(a) Prorating—accumulation and constant multiplier	28
	(b) Proportional Percentage—accumulation and constant divisor	30
11	Double Constant Application	32
12	Squaring and Square Root	
	(a) Squaring and raising to higher powers	33
	(b) Square Root	35

Offices within the United Kingdom and Eire for Sales, Service and Training are listed on page 36.

For advice concerning applications not listed above, contact your nearest Sales office.

Ingetekende knop is elk getal + zichzelf (anders gezegd x2)



ANITA Mk. 12—a three register, two store Electronic Calculator.

Register I displays entries and results in eleven answer tubes. The right hand tube number 12 is part of the internal checking system, always displays 0, and is never read as part of a result.

Registers II and III are internal storage registers and retain calculating factors or are used for accumulation.

Direct access to active internal stores means a new high degree of simplicity and speed in handling all arithmetic sequences.

THE FUNCTION CONTROLS

Registers II and III are identical and interchangeable in function.

This table describes the function of Anita's controls when Register II is engaged.

NAME	SYMBOL	CLEARs INITIALLY	FUNCTION	CLEARs FINALLY
ENTER	⊕	II	Transfers information directly from Register I to Register II	I
MULTIPLY	x		Multiplies Register I by Register II	
DIVIDE	÷		Divides Register I by Register II	
READ	◇	I	Displays, in Register I, the content of Register II	
ADD	+		Adds Register I to Register II	I
SUBTRACT	—		Subtracts Register I from Register II	I
TAB LEFT	←		Moves information in Register I one place to the left	
COMPLEMENT READ	◇ —	I	Displays, in Register I, the complement of the content of Register II	
TAB RIGHT	→		Moves information in Register I one place to the right	
INTERCHANGE	↕		Interchanges information between Register I and Register II	
ADD TO STORE	<i>gn</i> ⊕		Adds Register I to Register III	I
STORE READ	<i>gn</i> *	I	Transfers information from Register III to Register I	III
REGISTER I	<i>rd</i> I	I	Clears Register (i.e. Display Register)	I
REGISTER II	<i>gn</i> II		Engages Register II	
REGISTER III	<i>gn</i> III		Engages Register III	
	<i>gs</i> I	I II-III	<i>Voor alle registers getal x 2</i>	

NOTE NO. 1

MULTIPLICATION

Register II or Register III can be used for multiplying purposes.

Register II is used in working the examples given.

As in the case of all examples in this booklet, although the explanation of every operating sequence commences with the "Control Action" of engaging Register II or Register III, this is unnecessary if the intended active Register is already engaged.

1. Example.

$$37.5 \times 186.25 = 6984.375$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II I	
37.5		37.5
	⊕	
186.25		186.25
	×	6984.375

2. Example.

$$.93 \times .46 \times 227 = 97.1106$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II I	
.93		.93
	⊕	
.46		.46
	×	.4278
	⊕	
227		227
	×	97.1106

NOTE NO. 2 DIVISION

The versatility of ANITA Mk. 12 is enhanced in that either the Divisor or Dividend may be entered first.

METHOD A.—Entering the DIVISOR first.

1. Example.

$$\frac{653.8875}{49.35} = 13.25$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II I	
49.35		49.35
653.8875	⊕	653.8875
	÷	13.25

METHOD B—Entering the DIVIDEND first

1. Example.

$$\frac{4.875}{.625} = 7.8$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II I	
4.875		4.875
.625	⊕	.625
	↕	4.875
	÷	7.8

NOTE: When the DIVISOR is less than .1 see Note B, Page No. 26

NOTE NO. 3
CHECKING AND RECALLING

Anita Mk. 12 permits all information to be checked, both visually upon initial entry, and by recall after calculation. Products and quotients can then be recalled as a check of the written answer and for further use.

MULTIPLICATION

1. Example.

$$140.3 \times 22.4 = 3142.72$$

INDEX	CONTROL ACTION	REGISTER 1 READS
140.3 22.4	II	
	I	
	$\oplus$	140.3
		22.4
	$\times$	3142.72
	$\div$	22.4
	$\updownarrow$	140.3
	$\times$	3142.72

DIVISION

1. Example.

$$\frac{4293.625}{12.25} = 350.5$$

INDEX	CONTROL ACTION	REGISTER 1 READS
12.25 4293.625	II	
	I	
	$\oplus$	12.25
		4293.625
	$\div$	350.5
	$\times$	4293.625
	$\updownarrow$	12.25
	$\div$	4293.625

NOTE NO. 4 CONSTANTS

The special design of Anita Mk. 12 provides an easy operating sequence for calculations involving a Constant Multiplier, Divisor or Dividend.

CONSTANT MULTIPLIER

A multiplier entered in the engaged register is held until it is cancelled automatically by entering $\oplus$ a new factor.

1. Example.

$$\begin{array}{rcl} 81.25 \times 2.79375 & = & 226.9921875 \\ 325. \times 2.79375 & = & 907.96875 \\ 1600. \times 2.79375 & = & 4470. \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	Π	
	$\boxed{I}$	
2.79375		2.79375
	$\oplus$	
81.25		81.25
	$\times$	226.9921875
	$\boxed{I}$	
325.		325.
	$\times$	907.96875
	$\boxed{I}$	
1600.		1600.
	$\times$	4470.

CONSTANT DIVISOR

A Divisor entered in the engaged register is held until it is cancelled automatically by entering $\oplus$ a new factor.

1. Example.

$$324 \div 18.75 = 17.28$$

$$88.5 \div 18.75 = 4.72$$

$$15.75 \div 18.75 = .84$$

INDEX	CONTROL ACTION	REGISTER 1 READS
18.75	Π	18.75
	$\boxed{I}$	
324	$\oplus$	324
	$\div$	
88.5	$\boxed{I}$	17.28
	$\div$	
15.75	$\boxed{I}$	88.5
	$\div$	
		4.72
		15.75
		.84

CONSTANT DIVIDEND

The Recall and Interchange features of MK. 12 are used to retain a Constant Dividend.

1. Example.

$$15562.26 \div .756 = 20585.$$

$$15562.26 \div 12.48 = 1246.9759615$$

$$15562.26 \div 240.6 = 64.68104738$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
.756.	⊕	.756
15562.26	÷	15562.26
	×	20585.
	⊕	15562.26
12.48.	↕	12.48
	÷	15562.26
	×	1246.9759615
	⊕	15562.26
240.6	↕	240.6
	÷	15562.26
		64.68104738

NOTE NO. 5 **ADDITION AND SUBTRACTION**

Either the engaged or disengaged register may be used. Examples of both methods are given and in illustrating them, Register II is engaged.

METHOD 1.—Using the Engaged Register.

A decimal point is pre-set to allow for the largest entry and result.

1. Example.

$$\begin{array}{r} 76.45 \\ 269.50 \\ 112.25 \\ \hline 458.20 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
000.	II I	Decimal Point No. 4
0 76.45	⊕ → 1x	76.45
269.5	+	269.5
112.25	+	112.25
	+	
	◇	458.20

$$\begin{array}{r} 36. \\ 2072. \\ - \quad 4.5 \\ - \quad 120.25 \\ \hline 1983.25 \end{array}$$

7 II and

3. Example.

$$\begin{array}{r} - 3489.25 \\ 3412.35 \\ - \quad 63.75 \\ \hline - 140.65 \end{array}$$

11

METHOD 2—Using the Disengaged Register.

Enter a decimal point to allow for the largest item, or answer, that is likely to be required. The decimal point will be retained in position within Register III, after the answer has been cleared.

1. Example.

$$\begin{array}{r} 312.25 \\ 17.35 \\ 1406.75 \\ 1.45 \\ \hline 1737.80 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
000000.	III I ⊕ II	Decimal Point No. 7 5
312.25	→ 1x	312.25
17.35	→ 2x	17.35
1406.75	+	1406.75
1.45	→ 3x	1.45
	+	
	+	
	*	1737.80

onwys gedoe.

2. Example.

$$\begin{array}{r} 1986.375 \\ 4.875 \\ - 21.25 \\ \hline 1970.00 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
1986.375		<i>For placing decimal point see ex. method 2 p. 12</i> 1986.375
000 4.875		4.875
00 21.25		21.25
		1970

3. Example.

$$\begin{array}{r} - 205.25 \\ 963.45 \\ 1375.68 \\ - 2136.85 \\ \hline - 2.97 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
205.25		205.25
963.45		963.45
1375.68		1375.68
2136.85		2136.85
See Note Below		99999997.03
		- 2.97

NOTE: When a complementary result is displayed by using it must be entered to an internal register before using .



it must be

NOTE NO. 6 ACCUMULATION

Individual answers are accumulated and aligned in store around a pre-set decimal point.

To work the examples given for this note, Register III is used to accumulate individual results.

Each example is worked using a Decimal Point pre-set in Register III at position 6, so as to provide sufficient capacity for the accumulated results. Having been established to work Examples No. 1, the Decimal Point position is retained for use in working Examples 2-5.

As for Addition, to establish the Decimal Point within Register III, and for the following examples, at position 6,

1. Engage Register III
2. Clear Register I
3. Index 0 five times
4. Enter (E)
5. Engage Register II and proceed.

ACCUMULATING PRODUCTS.

Example 1.

$$\begin{array}{rcl}
 6.75 \times 34.9 & = & 235.575 \\
 12.4 \times 105.35 & = & 1306.34 \\
 3.5 \times 2.5 & = & 8.75 \\
 \hline
 & & 1550.665
 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
N.B. Introduction to this Note	II * I	Decimal Point No. 6
00 6.75	E	6.75
34.9	E	34.9
	$\times$	235.575
	$\rightarrow 2 \times$	
12.4	E	12.4
105.35	E	105.35
	$\times$	1306.34
00 3.5	E	3.5
0 2.5	E	2.5
	$\times$	8.75
	$\rightarrow 3 \times$	
	E	
	E	
	*	1550.665

NEGATIVE MULTIPLICATION

Example 2.

$$(104.5 \times 67.3) - (14.2 \times 3.8) = 6978.89$$

INDEX	CONTROL ACTION	REGISTER 1 READS
N.B. Introduction to this Note	II * I	Decimal Point No. 6
104.5	⊕	104.5
67.3	×	67.3
		7032.85
14.2	⊕	14.2
3.8	⊕	3.8
	× III 2x <i>acc.</i> II ⊖	53.96
	III II *	6978.89

See ex. 3 on page 13

NEGATIVE MULTIPLICATION *continued*

Example 3.

$$(1327.5 \times 5.3) - (1035.4 \times 9.25) = -2541.7$$

INDEX	CONTROL ACTION	REGISTER 1 READS
N.B. Introduction to this Note	II * I	Decimal Point No. 6
1327.5		1327.5
5.3	⊕	5.3
	×	7035.75
1035.4	+	1035.4
9.25	⊕	9.25
	×	9577.45
	⊖ ⊕ ⊖ ⊕ acc. ⊖ ⊕	
	* ⊕ ◆	997458.3
	⊖ ⊕	- 2541.7

NOTE: When a complementary result is displayed by using  it must be entered

See ex. 3 on page 13

ACCUMULATING QUOTIENTS—Positively and Negatively

Example 4.

$$1607.4 \div 3.2 = 502.3125$$

$$96875.3 \div 10.25 = 9451.24878$$

$$\underline{9953.56128}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
N.B. Introduction to this Note	II * I	Decimal Point No. 6
400 3.2		3.2
1607.4	⊕ ÷ → 2x +	1607.4
		502.3125
10.25	⊕ ÷ → 2x + *	10.25
96875.3		96875.3
		9451.2487805
		9953.56128

ACCUMULATING QUOTIENTS *continued*

Example 5.

$$\begin{aligned} 24.35 \div .375 &= 64.9333\overline{3}^{40} \\ - 2105.125 \div 6.4 &= 328.92578\overline{0} \\ - 263.9924\overline{5}^{40} \end{aligned}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
N.B. Introduction to this Note	II * I	Decimal Point <i>page 14</i> No. 6 <i>6</i>
.375		.375
24.35	⊕	24.35
	÷	64.9333 333 ⁴⁰ <i>64.9333</i>
6.4	+	6.4
2105.125	⊕	2105.125
	÷	328.92578 02
	III ⊖ II * ⊕ ⬢	999736-0075 5 ⁶⁰ - 263.9924 5 ⁴⁰

NOTE NO. 7 COMBINED FUNCTIONS

The tabulating keys of ANITA Mk. 12 are used to move figures in Display Register I to the right → or left ←. They are used to ensure that (a) a Multiplier in Register II or Register III has its most significant figure in position Tube No. 2 or to the right of it. (b) a Divisor in Register II or Register III has its most significant figure in position Tube No. 2 (c) a Dividend has its most significant figure in Tube No. 2 or to the right of it.

DIVISION FOLLOWED BY MULTIPLICATION

1. Example.

$$\frac{4935.7}{68.4} \times 67.25 = 4852.716739$$

INDEX	CONTROL ACTION	REGISTER 1 READS
68.4 4935.7 67.25	II	
	I	
	⊕	68.4
	⊕	4935.7
	÷	72.15935672
	⊕	67.25
	×	4852.716739

2. Example.

$$\frac{735.4}{1.25} \times 9.6 = 5647.872$$

INDEX	CONTROL ACTION	REGISTER 1 READS
1.25 735.4 9.6	II	
	I	
	⊕	1.25
	⊕	735.4
	÷	588.32
	→ /X	588.32
	⊕	9.6
	×	5647.872

MULTIPLICATION FOLLOWED BY DIVISION

1. Example.

$$\frac{673.4 \times 13.8}{89.4} = 103.947651$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
673.4		673.4
13.8	⊕	13.8
	×	9292.92
89.4	⊕	89.4
	↕	9292.92
	÷	103.947651

2. Example.

$$\frac{496.3}{(9.42 \times 7.5)} = 7.024769993 \text{ (Calculating the Denominator first)}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
9.42		9.42
7.5	⊕	7.5
	×	70.65
496.3	⊕	496.3
	÷	7.024769993

MULTIPLICATION FOLLOWED BY DIVISION

3. Example.

$$\frac{827.5}{(1.4 \times 2.3)} = \frac{39.59627329}{256.98757764} \text{ (calculating the Denominator first)}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
1.4		1.4
2.3	⊕	2.3
	x	3.22
	←	3.22
827.5	⊕	827.5
	÷	256.98757764

DIVISION FOLLOWED BY DIVISION (CONTINUED DIVISION)

1. Example.

$$\frac{2136.95}{9.875 \times 84.9875} = 2.546256802$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
9.875		9.875
2136.95	⊕	2136.95
	÷	216.4
84.9875	⊕	84.9875
	↕	216.4
	÷	2.546256802

MULTIPLICATION FOLLOWED BY DIVISION

3. Example.

$$\frac{827.5}{(1.4 \times 2.3)} = \frac{39.59627329}{256.98757764} \text{ (calculating the Denominator first)}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
1.4		1.4
2.3	⊕	2.3
	x	3.22
	←	3.22
827.5	⊕	827.5
	÷	256.98757764

DIVISION FOLLOWED BY DIVISION (CONTINUED DIVISION)

1. Example.

$$\frac{2136.95}{9.875 \times 84.9875} = 2.546256802$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
9.875		9.875
2136.95	⊕	2136.95
	÷	216.4
84.9875	⊕	84.9875
	↕	216.4
	÷	2.546256802

MULTIPLICATION FOLLOWED BY DIVISION

3. Example.

$$\frac{827.5}{(1.4 \times 2.3)} = \frac{39.59627329}{256.98757764} \text{ (calculating the Denominator first)}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
1.4		1.4
2.3	⊕	2.3
	x	3.22
	←	3.22
827.5	⊕	827.5
	÷	256.98757764

DIVISION FOLLOWED BY DIVISION (CONTINUED DIVISION)

1. Example.

$$\frac{2136.95}{9.875 \times 84.9875} = 2.546256802$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
9.875		9.875
2136.95	⊕	2136.95
	÷	216.4
84.9875	⊕	84.9875
	↕	216.4
	÷	2.546256802

CONTINUED DIVISION (Continued)

2. Example.

$$\frac{735.5}{1.25 \times 2.8} = 210.14285714$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II I	
1.25		1.25
735.5	⊕	735.5
	÷	588.4
	→	588.4
2.8	⊕	2.8
	↕	588.4
	÷	210.14285714

ADDITION FOLLOWED BY DIVISION

1. Example.

$$\frac{9687.5 + 6875.25}{1246.75} = 13.28474$$

INDEX	CONTROL ACTION	REGISTER 1 READS
00000- (See introduction to Note 5.)	II I	Decimal Point No. 6 <i>page 114</i>
<i>00</i> 9687.5	⊕	<i>00</i> 9687.5
<i>00</i> 6875.25	⊕	<i>00</i> 6875.25
<i>00</i> 1246.75	÷	16562.75
	↕	1246.75
	÷	16562.75
	→	13.284740325
		<i>000013.28474</i>

NOTE NO. 8
INVOICING
DISCOUNTS AND INCREMENTS

DISCOUNT

Example.

$$\begin{array}{rcl} 165.75 @ 7.35 & = & 1218.2625 \\ \text{less } 8\% & = & \underline{97.461} \\ & & 1120.8015 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
165.75		165.75
	⊕	
7.35		7.35
	x	1218.2625 <i>decim. p. in 5</i>
	⊕	
.08		.08
	x	97.461
	<i>1x</i> → —	
	◇	1120.8015

INCREMENT

Example.

$$\begin{array}{rcl} 1245.25 @ 18.5 & = & 23037.125 \\ \text{plus } 5\frac{1}{2}\% & = & \underline{1267.0418} \\ & & 24304.1668 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
	II	
	I	
1245.25		1245.25
	⊕	
18.5		18.5
	x	23037.125 <i>decim. p. in 7</i>
	⊕	
.055		.055
	x	1267.0418
	+	
	◇	24304.1668

INVOICING (Continued)

1. Invoice Example.

$$\begin{array}{r}
 105.2 \times 16.3 = 1714.76 \\
 7.4 \times 25.5 = 188.70 \\
 10.6 \times 7.8 = 82.68 \\
 \hline
 1986.14 \\
 \text{less } 4\frac{1}{2}\% = 89.38 \\
 \hline
 1896.76
 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
See Introductory Note to 'Accumulation'.	II * I	Decimal Point No. 6 <i>page 114</i> 105.2
105.2		105.2
16.3	⊗ ⊕ x +	16.3
		1714.76
7.4	⊕ ⊕	7.4
25.5		25.5
	x → 2x +	188.70
10.6	⊕ ⊕	10.6
7.8	x → 2x +	7.8
		82.68
	+ *	1986.14
.045	⊕ x 1x ← if decim. p. is not on six place — ◇	.045
		89.3763
		1896.7637

NOTE: If when  is used the result commences in Tube No. 1 → before 

2. Example.

$$\begin{array}{rcl}
 4106 @ 2.75 \text{ per doz.} & = & 940.96 \\
 \text{less } 6\% & = & 56.46 = 884.50 \\
 12176 @ 14.5 \text{ per gross} & = & 1226.06 \\
 \text{plus } 3\% & = & 36.78 \quad \underline{1262.84} \\
 & & 2147.34 \\
 & & \underline{53.68} \\
 & & 2201.02
 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
See Introductory Note to 'Accumulation'	II * I	Decimal Point No. 6
12 4106	⊕ ÷	12 4106 342.16°
	→ 1x	0342.16°
2.75	⊕ x	2.75
	→ 1x	940.9583° <i>decim. p. in 6</i>
.06	⊕ x	.06
	→ 1x	56.4575 <i>decim. p. in 6</i>
	◇	884.500833
144	+	144.
12176	⊕ ÷	12176. 84.5°
14.5	⊕ x	14.5
	→ 1x	1226.05° <i>decim. p. in 6</i>
.03	⊕ x	.03
	+	36.781667 <i>decim. p. in 6</i>
	◇	1262.837221
	+	
	*	2147.33806
.025	⊕ x	.025
	+	53.68345 <i>decim. p. in 6</i>
	◇	2201.02151

NOTE NO. 9 THE RING DECIMAL POINT

The Ring Decimal Point system is a unique feature which enables the capacity of ANITA Mk. 12 to display always correct results to the extent of the ten most significant digits.

DIVISION

Example 1.

$$\frac{1}{23675.75} = .00004223731033$$

INDEX	CONTROL ACTION	REGISTER 1 READS
23675.75	II I ⊕ ÷	23675.75
1	Result =(See Note A.)	1
		0422373.1033
		.00004223731033

NOTE A.

In the above example, upon the use of the ÷ control, the decimal point moved to the left and re-entered the Display Register from the right. This illustrates the Ring System. The new decimal point position is used to determine the value of the result in display. The number of the illuminated decimal point is subtracted from 10 to indicate the number of zeros which follow the decimal point in the result and which precede the remaining part of the result which is on display. *10 - 7 = 3 So 3 zeros*

NOTE B.

To enter a small decimal amount, as required in Example 2, subtract the number of zeros following the decimal point from 11, to determine the decimal point position to be indexed before entry.

Example 2.

$$\frac{6.5}{.00047} = 13829.787234$$

INDEX	CONTROL ACTION	REGISTER 1 READS
4700000 (See Note B.)	II I ⊕ ÷	04700000.0000
6.5		6.5
		13829.787234

MULTIPLICATION

1. Example.

$$\cdot 006742 \times \cdot 0000439 = \cdot 0000002959738$$

INDEX	CONTROL ACTION	REGISTER 1 READS
67420000 (See Note B.) 439000 (See Note B.)	II I	067420000·000
	⊕	0439000·00000
	×	02959·738
	Result = (See Note A.)	·0000002959738

A. The value of the product of a large factor multiplication can be established using the Ring Decimal Point System. In the following example, upon multiplying, the decimal point moves to the right, and re-enters display from the left. In order to establish the value of the product, the number of zeros which should follow the displayed product is determined by subtracting 1 from the illuminated decimal point position.

2. Example.

$$1455000 \times 264755 = 385218525000$$

INDEX	CONTROL ACTION	REGISTER 1 READS
1,455,000 264,755	II I	1,455,000
	⊕	264,755
	×	0038·5218525
	Result = (See Note Above)	385218525000

NOTE NO. 10 **ACCUMULATION AND CONSTANT** **FACTOR WORK COMBINED**

PRORATING (CONSTANT MULTIPLIER)

1. Example.

Proportion 1075.25 amongst the items in the first column.

125.	=	353.00
56.25	=	158.85
14.5	=	40.95
185.	=	522.45
<u>380.75</u>	=	<u>1075.25</u>

INDEX	CONTROL ACTION	REGISTER 1 READS
See Note to "Accumulation"	II	Decimal Point No. 6
0125.	*	
See Note at foot of example	I	125.
0056.25	⊕	56.25
0014.5	+	14.5
0185.	+	185.
	+	
	◇	380.75
1075.25	⊕	1075.25
	÷	2.8240315156
125.	⊕	125.
	x	353.003939
56.25	+	56.25
	x	158.8517727
14.5	+	14.5
	x	40.9484569
185.	+	185.
	x	522.445830
	+	
	*	1075.24998

NOTE: Instead of pre-setting a decimal point position when Adding (See Note 5.), all examples under Note No. 10 use an alternative method. The first item of addition is indexed and entered (⊕) so as to establish a suitable decimal point position in the engaged register, to which subsequent additions align automatically.

2. Example.

Proportion 496-375 amongst the items in the first column.

$$\begin{array}{rcl} 967.35 & = & 37.023 \\ 4912.50 & = & 188.013 \\ 1075.25 & = & 41.152 \\ 6014.45 & = & 230.187 \\ \hline 12969.55 & = & 496.375 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
See Note to "Accumulation"	II	Decimal Point No. 6
	*	
	I	
0967.35		00967.35
See Note at foot of page No. 28	⊕	
4912.5	+	4912.5
1075.25	+	1075.25
6014.45	+	6014.45
	◇	12969.55
N.B. The most significant figure of a divisor must be in Tube No. 2	→	012969.55
	⊕	
496.375	÷	496.375
N.B. See Ring Decimal Point Note No. 9		382723379.00
N.B. The most significant figure of a multiplier in the engaged register must not be in Tube No. 1	→	.0382723379.0
	⊕	
967.35	×	967.35
	+	37.02274606
	×	
4912.5	+	4912.5
	×	188.0128599
	+	
1075.25	×	1075.25
	+	41.1523313
	×	
6014.45	+	6014.45
	×	230.1870626
	+	
	*	496.37498

PROPORTIONAL PERCENTAGE—CONSTANT DIVISOR

1. Example.

Express the following items as a Percentage of their total.

2126 = 85.15%
 315 = 12.62%
 45.5 = 1.82%
 10.25 = .41%
~~2469.75~~ 100.00%
 2496.75

INDEX	CONTROL ACTION	REGISTER 1 READS
See Notes to "Accumulation"	II	Decimal Point No. 6
2126	*	
See Note at foot of page No. 28	I	2126
315	⊕	315
45.5	+	45.5
10.25	+	10.25
	+	
00000000 (to divide 2496.75) 100	◇	2496.75 24.9675
	⊕	
2126	÷	2126
	÷	85.15069591
315	+	
	÷	315
	÷	12.616401321
45.5	+	
	÷	45.5
	÷	1.8223690798
10.25	+	
	÷	10.25
	÷	.4105336938
	+	
	*	99.99998

2. Example.

Express the following as a percentage of their total.

84	=	.58%
9967	=	69.37%
3905	=	27.18%
412.25	=	2.87%
<u>14368.25</u>		<u>100.00%</u>

INDEX	CONTROL ACTION	REGISTER 1 READS
See Notes to "Accumulation"	II * I	Decimal Point No. 6
0084		0084
See note at foot of page No. 28	⊕	
9967		9967
3905	+	3905
412.25	+	412.25
	+	14368.25
N.B. The most significant figure of a divisor must occupy Tube No. 2	◇	
00000000	→	014368.25
(To divide <u>14368.25</u>)		
100	⊕	143.6825
84		84
See Ring Decimal Point	÷	5846223444.1
Note No. 9	→	
N.B. A number to be stored must have its decimal point at No. 1 or to the right of it.	+	.5846223444
9967		9967
	÷	69.368225080
3905	+	3905
	÷	27.177979225
412.25	+	412.25
	÷	2.8691733510
	+	
	*	99.99998

NOTE No. 11 **DOUBLE CONSTANT APPLICATIONS**

1. Example.

Combined Constant Multiplier and Constant Divisor.
Show the following items as a percentage of their total and 154.75 in proportion amongst them.

$$\begin{array}{rcl} 29.75 & = & 13.55\% = 20.97 \\ 103.35 & = & 47.07\% = 72.85 \\ 86.45 & = & 39.38\% = 60.93 \\ \hline 219.55 & = & 100.00\% = 154.75 \end{array}$$

INDEX	CONTROL ACTION	REGISTER 1 READS
2.1955	II	
	I	
		2.1955
	⊕	
	III	
	1.5475	1.5475
	⊕	
	II	
	29.75	29.75
	* ÷	13.55044409
1.5475	III	
	x	20.96931222
	II	
	I	
		103.35
	* ÷	47.07355955
	III	
	x	72.8463334
	II	
	I	
29.75		86.45
	* ÷	39.375996356
	III	
	x	60.93435436

NOTE No. 12A **SQUARING AND RAISING NUMBERS TO HIGHER POWERS**

1. Example.

$$10.52^2 = 110.6704$$

INDEX	CONTROL ACTION	REGISTER 1 READS
10.52	II	
	I	
	⊕	10.52
	◇	10.52
	×	110.6704

2. Example.

$$1.46^3 = 3.112136$$

INDEX	CONTROL ACTION	REGISTER 1 READS
1.46	II	
	I	
	⊕	1.46
	◇	1.46
	×	2.1316
	×	3.112136

3. Example.

$$1.5^4 = 5.0625$$

INDEX	CONTROL ACTION	REGISTER 1 READS
1.5	II	
	I	
	⊕	1.5
	◇	1.5
	×	2.25
	⊕	
	◇	2.25
	×	5.0625

4. Example.

$$1.0775^{10} = 2.109467253$$

INDEX	CONTROL ACTION	REGISTER I READS
	II	
	I	
1.0775		1.0775
	⊕	
	◇	1.0775
	III	
	⊕	
	◇	
(To obtain maximum decimal capacity)	←	1.0775 1.0775
	×	1.16100625
	⊕	
	◇	1.16100625
	←	1.16100625
	×	1.347935512
	II	
	←	1.3479355125
	×	1.452400514
	⊕	
	◇	1.452400514
	←	1.452400514
	×	2.109467253

acc

NOTE No. 12B
SQUARE ROOT CALCULATION

$$\sqrt{N} = \frac{1}{2} \left(\frac{N}{a} + a \right)$$


By applying the above formula, ANITA Mk. 12 provides a rapid method of solving Square Root problems.

1. Example.

$$\sqrt{1245.75} = 35.29518381$$

INDEX	CONTROL ACTION	REGISTER 1 READS
1245.75	II	1245.75
	I	
	⊕	
	III	
35 (i.e. approximate root)	⊕	35
	II	1245.75
	◇	
	III	
	÷	
.5	+	35.59285714
	×	
	⊕	
	II	
	◇	35.29642857
	III	
	÷	
	+	
.5	×	35.29518383
	⊕	
	II	
	◇	
	III	1245.75
	÷	
	+	
	×	
.5	⊕	35.29393909
	II	
	◇	
	III	
(To prove)	÷	35.29518379
	+	
	×	
	⊕, ◇, ×	
		.5
		35.29518381
		1245.749999

acc.



Sumlock Comptometer Limited

39 ST JAMES'S STREET · LONDON S.W.1 · TELEPHONE · HYDE PARK 1331 & 1532

(A MEMBER OF THE LAMSON INDUSTRIES GROUP)

OFFICES FOR SALES, SERVICE AND TRAINING

LONDON:

102/8 Clerkenwell Road,
London, E.C.1.
CLerkenwell 2444.

1/3 Ashbourne Parade,
Hanger Lane,
Ealing, W.5.
ALPerton 1771/2.

Torrington House,
Lodge Lane,
North Finchley, N.12.
HILlside 6321.

CROYDON:

Green Dragon House,
High Street.
MUNicipal 6411/8.

ILFORD:

301 Cranbrook Road.
VALentine 8243/4.

BELFAST:

58 Howard Street.
Belfast 28023/4.

BIRMINGHAM:

St. Martin's House,
Bullring, Birmingham 5.
Midland 6351.

BRADFORD:

Britannia House,
Broadway.
Bradford 27798.

BRISTOL:

Martins Bank Chambers,
4-6 The Horsefair.
Bristol 26683/5.

CARDIFF:

7 High Street.
Cardiff 27148/26957.

CORK:

55 Grand Parade.
Cork 23261.

DUNDEE:

40 Bellfield Street.
Dundee 22769.

DUBLIN:

Fullers Building,
84 Grafton Street.
Dublin 775727.

EDINBURGH:

38 York Place.
Waverley 2071.

GLASGOW:

17 Cadogan Street.
City 7261/3.

HULL:

45/47 Savile Court.
Central 36246.

KENILWORTH:

18 Talisman Square.
Kenilworth 54425

LEEDS:

Empire House,
King Edward Street,
Briggate.
Leeds 34491/4.

LEICESTER:

Norwich Union House,
Horsefair Street.
Leicester 29426/7.

LIVERPOOL:

Spinney House,
Church Street.
Royal 9901/5.

MANCHESTER:

196 Deansgate.
Deansgate 3887/9.

MIDDLESBROUGH:

54/56 Albert Road.
Middlesbrough 2471/2.

NEWCASTLE-ON-TYNE:

92/96 Blandford Street.
Newcastle 29506/7.

NORWICH:

17a Colegate.
Norwich 26250/26259.

NOTTINGHAM:

Rodney House,
Castle Gate.
Nottingham 55777/8/9.

PRESTON:

9a Starkie Street.
Preston 84686.

PLYMOUTH:

16 Mutley Plain.
Plymouth 62616.

SHEFFIELD:

Castle Market Buildings.
Sheffield 26420.

SOUTHAMPTON:

12 Bargate.
Southampton 21614.

STOKE-ON-TRENT:

London House,
London Road.
Stoke 47812.

SWANSEA:

Grove House,
3 Grove Place.
Swansea 55258.

WOLVERHAMPTON:

St. John's House,
St. John's Square.
Wolverhampton 24224/5/6

Additionally, there are TRAINING COLLEGES at:

LONDON:

58/59 Berners Street,
London, W.1.
LANgham 3665/6.

SOUTHEND-ON-SEA:

21a Cliff Town Road.
Southend 48894.

