


X3



For Android Tablets & Smartphone



For iPhone / iPad



For Windows PC



For VR




WIRELESS CONTROLLER

X3

Wireless game controller

User Manual (X3)

Function diagram:

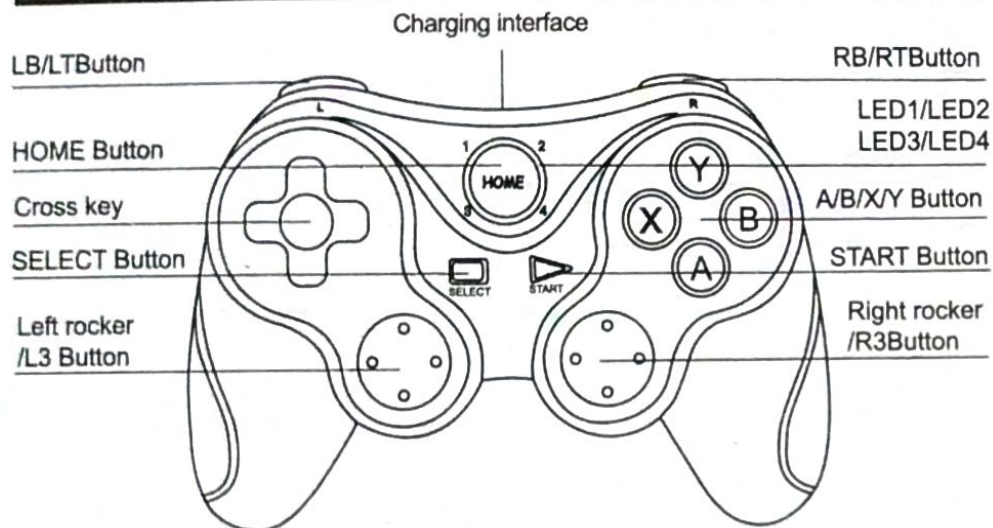

Applicable instructions:

1. This product adopts ergonomic design and feels comfortable.
2. It adopts Bluetooth 5.0 edr/ble connection, and the controller is connected with N-S and other hosts through Bluetooth.
3. This handle is applicable to switch, ps3/ps4, Android, IOS mfi/apple arcade, PC Steam and other platforms.
4. It supports shootingplus V3 app, which can be downloaded through various mobile application markets.
5. Support Android and Hongmeng hid standard mode, and you can play all kinds of game hall games that support HID standard mode.
6. Support mfi/apple arcade games in IOS 13.0 and above systems, and MFI games can also be found inShanwan MFI app download.
7. Support PS3 /ps4/switch game console to play games with Bluetooth connection.
8. Support gamepadspace app to set more additional functions for ps3/ps4/swtic mode.
9. Support Bluetooth connection of windows 10 system laptop and play X-input games.
10. It supports USB cable and can play pc/ps3/switch games.


Product instructions:

SWITCH Model:

On the switch host, select controller Controllers -> change grip / order to enter the switch host pairing mode interface press L+R on the controller.

At the same time, press the RT +  for 2 seconds to enter the switch mode for pairing. The controller LED2+LED3 flashes quickly. If the pairing is successful, the corresponding LED light will be on for a long time.


It has been successfully connected. You can press the  directly, LED2+LED3 will flash slowly, and it will be connected automatically.

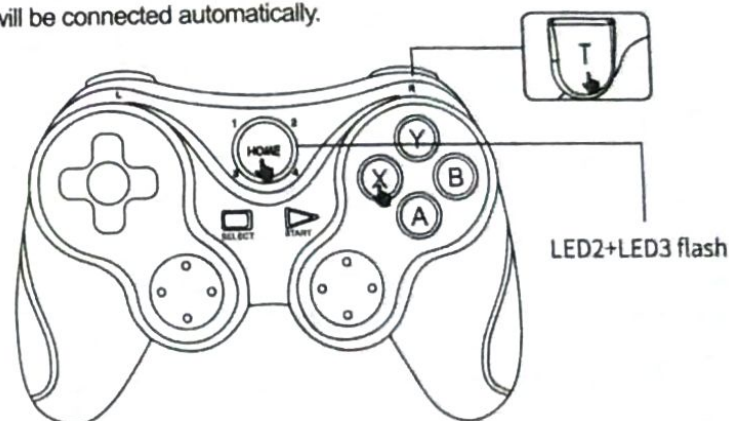

PS3/PS4 Mode:

Connect the controller directly with PS3/PS4 host with USB data cable, press the  to check the code, and the LED light will be automatically assigned if the code is checked successfully.


If it has been successfully connected, you can press the  directly, and the corresponding indicator light will be on for a long time, and it will be connected automatically.

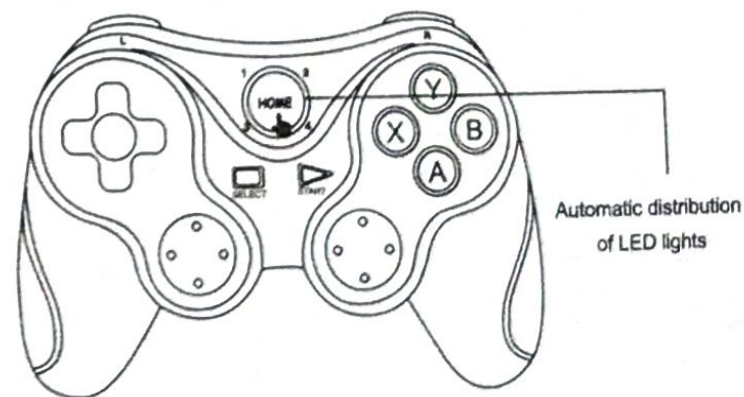

Android shootingplus V3 mode (Hongmeng system is the same as Android shootingplus V3 mode):

At the same time, press the **A + HOME** for 2 seconds to enter the V3 Android mode, and the controller LED1 flashes. When the Android phone searches for the "GamePadPlus V3" device name, select connect. After the connection is successful, the controller LED1 will be red for a long time.


It has been successfully connected. You can press the **HOME** directly, and the LED1 red light flashes slowly and connects automatically.

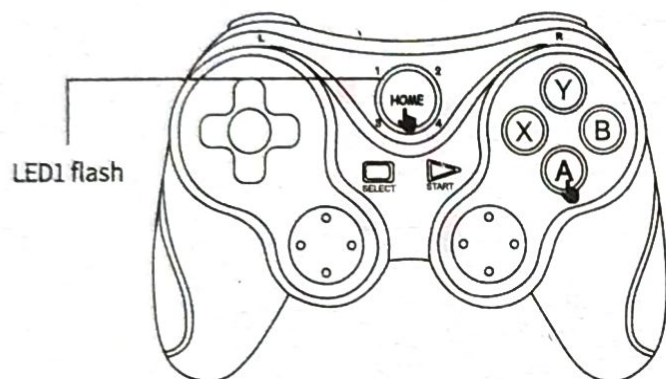

iOS ShootingPlus V3 Mode:

At the same time, press the **Y + HOME** for 2 seconds to enter the V3 IOS mode, and the controller LED2 flashes. When the Apple phone searches for the "GamePadPlus V3" device name, select connect. After the connection is successful, the controller LED2 is on for a long time.

It has been successfully connected. You can directly press the **HOME**, LED2 flashes slowly, and automatically connect back.

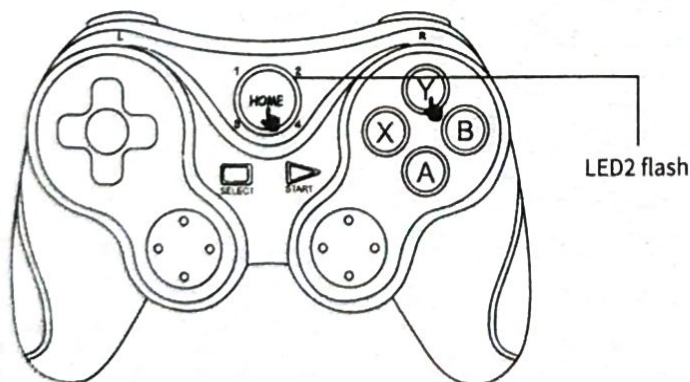


Android standard mode:

1. At the same time, press the **X + HOME** to enter the standard Android mode, and the controller LED4 flashes, when the Android / Hongmeng mobile phone searches for the "GamePadPlus V3" device name, select the connection. After the connection is successful, the controller LED4 will be on for a long time.

It has been successfully connected. You can press the **HOME** directly, and the LED4 light flashes slowly and connects automatically.

2. Android / Hongmeng standard mode game download, you can download all kinds of game halls, enter the platform to download the required games.

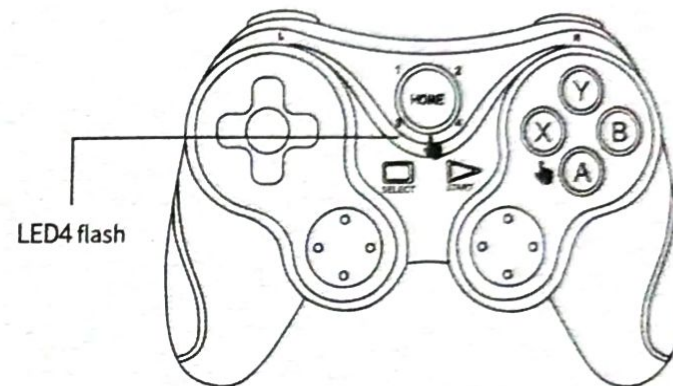


iOS MFi / Apple Arcade Mode (IOS 13.0 or above):

At the same time, press the **B + HOME** for 2 seconds to enter the IOS MFi mode, and the controller LED3 flashes. When the Apple phone searches the device name of "DUALSHOCK 4 Wireless Controller", select connect. After the connection is successful, the controller LED3 will be on for a long time.


It has been successfully connected. You can directly press the **HOME**, LED3 flashes slowly, and automatically connect back.

MFi games can also be downloaded from ShanWan MFi app.

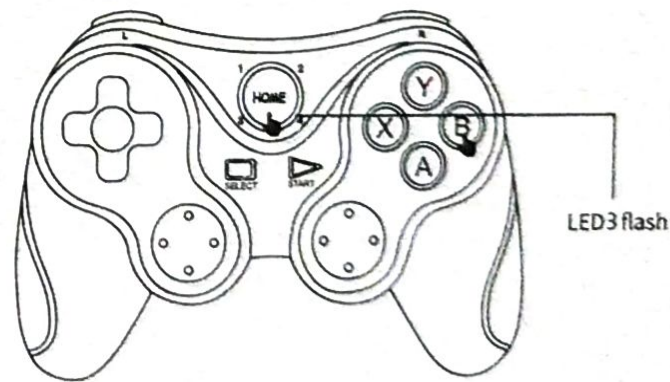

PC X-input Bluetooth Mode:

At the same time, press the **RB+Ⓢ** for 2 seconds to enter the X-input Bluetooth mode, and the controller LED1/LED2/LED3 flashes. When the PC searches the device name of "Xbox Wireless Controller", select connection. After the connection is successful, the controller led1/led2/led3 is on for a long time. It has been successfully connected. You can press the **Ⓢ** directly, led1/led2/led3 will flash slowly and connect automatically.

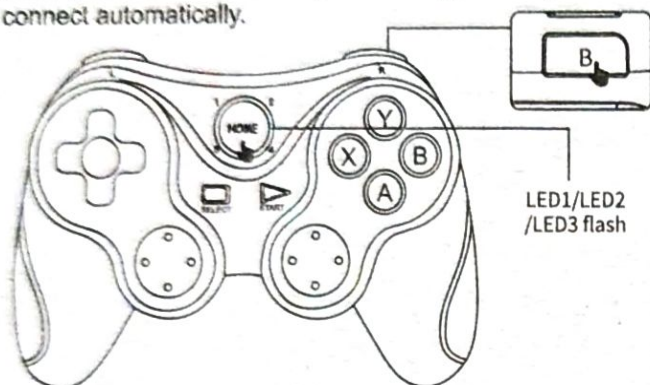

- Due to the problem of mobile phone system, some mobile phones may not support this device.
- Our company is not responsible for the inability of some games to connect with this product due to irresistible factors such as software upgrade or source code change of the official game platform. Our company reserves the right of final interpretation.

Electrical parameters:

- | | |
|--|---|
| 1. Working voltage:DC3.7V | 5. Working current:<25mA |
| 2. Duration of use:>20H | 6. Sleep current:<10uA |
| 3. Charging voltage / current:DC5V/500mA | 7. Bluetooth transmission distance:<=8M |
| 4. Battery capacity:400mAh | 8. Standby time: 30 days at full power |

2.4G mode (optional):

PC device / smart TV / TV box /PS3 host 2.4G wireless connection operation method:

1. Plug the 2.4G wireless receiver into the USB interface of PC device / smart TV / TV box.
2. Press the **L1+Ⓢ** at the same time, and the controller enters the wireless pairing mode. At this time, LED1 and LED2 indicator lights flash.
3. After the wireless connection is OK, LED1 and LED2 indicators are on for a long time.
4. You can start to operate PC device / smart TV / TV box /ps3 host to download and install games.

Controller charge / sleep / wake-up function:

1. When the controller is charged in the off state (press the **Ⓢ** to turn on / off), the corresponding mode indicator flashes slowly and remains on after full charge. When charging in the Bluetooth connection state, the corresponding mode indicator light flashes slowly and stays on after being fully charged.
2. Sleep / wake-up function: the game controller will enter sleep state if it is not used within 5 minutes. When heavy Press the **Ⓢ** to wake up when new use, and then connect back.
3. When the battery is low, the corresponding mode indicator flashes.
4. In wired mode, the corresponding mode does not make charging instructions.

Wired USB mode operation method and precautions:

1. Insert the USB cable, and the controller will automatically recognize the currently inserted device (you do not need to press the **Ⓢ** to start the machine in wired mode);
2. After USB is inserted,LED1/ LED2/ LED3 /LED4 flashes, in PS3 and switch host mode The indicator light after USB identification is successful will be automatically allocated according to the channel issued by the host (1,2,3,4-wayChannels correspond to LED1, LED2, LED3, LED4).

Matters needing attention:

1. Please do not store this product in a damp or hot place.
2. Do not knock, beat, stick, puncture, or try to disassemble this product, so as to avoid unnecessary damage to the product.
3. The built-in battery of the product should not be discarded with garbage.
4. Do not charge the handle near fire or other heat sources.
5. Non professionals are not allowed to disassemble this product, otherwise it will not be included in the after-sales warranty service.

List of products:



Wireless controller x1



Manual X1



TYPE-C USB cable X1

Operation mode:

Bluetooth profile:

Applicable system	Android system		iOS system	
Working mode	Android V3 games mode	Android standard HID mode	iOS MFi mode	iOS V3 mode
Mode pairing (long press for 2 seconds)	A Button +  Button	X Button +  Button	B Button +  Button	Y Button +  Button
Indicator light	LED 1	LED 4	LED 3	LED 2
Remarks	Play Android Market Downloaded games	Play games in the game hall	Play ShanWan MFi App in game	Play App Store in game

Other Bluetooth profiles:

Working mode	PS3 host	PS4 host	Switch host	PC Bluetooth mode
Mode pairing (long press for 2 seconds)	Plug in USB for pairing	Plug in USB for pairing	RT Button +  Button	RB Button +  Button
Indicator light	Host automatic allocation	Host automatic allocation	Host automatic allocation	LED 1+LED2 +LED3
Remarks	Play PS3 games	Play PS4 games	Play Switch games	Play PC X-input game

PS4 Bluetooth mode has no function in Android version

2.4G mode:

Applicable system	Windows system	PS3 Game Console	Switch game console
Working mode	2.4G wireless mode	2.4G wireless mode	2.4G wireless mode
Mode pairing (long press for 2 seconds)	LB Button +  Button	LB Button +  Button	LB Button +  Button
Indicator light	LED1+LED2	LED1+LED2	LED1+LED2
Remarks	Wireless receiver is required. Power on the default bit X-input 360 mode, press Select + start key for 2 seconds to switch to D-input mode	Wireless receiver required	Wireless receiver required

Wired mode:

Applicable system	Windows system	PS3 Game Console	Switch game console
Working mode	USB Wired mode	USB Wired mode	USB Wired mode
Mode pairing	Plug in USB automatic recognition	Plug in USB automatic recognition	Plug in USB automatic recognition
Unrecognized status	LED1/ LED2 /LED3 LED4 twinkle	LED1/ LED2/ LED3 LED4 twinkle	LED1 /LED2/ LED3 LED4 twinkle
Identification status	X -INPUT: LED1 D-INPUT :LED2	The corresponding channel light is always on	The corresponding channel light is always on
Remarks	Long press MODE for 5 seconds to switch X & D INPUT to each other		

X3

WIRELESS CONTROLLER

Support For Pad、Phone、Smart box、SmartTV、PC



For Android Tablets & Smartphone



For iPhone / iPad



For Windows PC



For VR

Feature

X3 android joystick support 5 kinds of models like Joystick /Mouse+Media/KeyBoard/Icade/PC..

For current Joystick mode, above 4.0 system from android is supportive, it is a standard joystick, the same function as USB joystick, any games which support USB joystick mode are workable. Mouse+Media mode is combination mouse function with multi-media function, the user can operate on page, greatly improve the operational experience. Plug a DONGLE into the PC, by management software, android joystick can be connected to be a standard PC joystick. The functions from mouse and multi-media keys can be used. KeyBoard mode is a standard keyboard mode, compatible with android, apple, and PC, the games by keyboard operation can be played. the Icade support apple platform game operating mode, compatible with the IPAD, IPHONE.