


INSTRUCTIONS FOR INSTALLING PetSafe™ LIGHTNING PROTECTOR

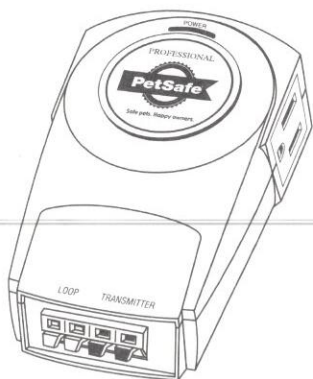

Model: M2DF-61

STEP 1 Plug the lightning protector into a grounded (3-wire) 120V AC outlet within five feet of where you want to locate the transmitter (Figure 1).

NOTE: If possible **DO NOT** use an AC circuit protected with a GFCI (Ground Fault Circuit Interrupter). Both the protector and the fence system will function properly, but in rare cases nearby lightning strikes may cause the GFCI to trip, and you will have to reset it.

STEP 2 Cut the loop wires near the protector and strip all four ends back 1/4 inch (Figure 2).

STEP 3 Push the connector tab firmly away from yourself. The connector jaws will open. Push the stripped end of the wire into the connector. Repeat with the other three wires (Figure 3).

STEP 4 It is very important that the two loop wires be connected to the left two (red) terminals of the protector as shown. The two transmitter wires must be connected to the right (black) terminals.

STEP 5 Plug the transmitter power transformer into either AC outlet on the side of the lightning protector. The transmitter should turn on. The cable ties may be used to attach the transformer to the protector.

STEP 6 If the protector is being added to an existing installed system, check the loop signal field. It may be necessary to adjust the signal field. If the lightning protector is being installed as part of a new system, proceed with the standard signal field adjustment process.

PROFESSIONAL



Safe pets. Happy owners.

The lightning protector is designed to protect electronic pet containment system transmitters against damage from lightning. The unit contains two protectors - one to stop lightning currents from coming in on the loop wire and the other to stop lightning currents from coming in on the AC power connection.

The Lightning Protector takes only a few minutes to install!

- If you are adding the protector to an existing electronic pet containment system, make sure the pet is confined before you begin the work, since the system will be turned off for a few minutes.
- Do not perform the installation while there is a lightning storm (visible lightning flashes) in the area.
- Unplug the transmitter power transformer from the wall outlet.

FIGURE 1




FIGURE 2





FIGURE 3



LIFETIME PRODUCT WARRANTY

Radio Fence Distributors warrants to the purchaser of the PetSafe Lightning Protector, for his or her life, that the surge protector shall be free of defects in design, material or workmanship. Radio Fence Distributors will repair or replace any defective unit.

Radio Fence Distributors will also repair or replace any PetSafe Lightning Protector that has suffered damage from a lightning surge or line overvoltage.

NOTE: The PetSafe Lightning Protector is specifically designed for electronic dog fence systems and will not protect other kinds of equipment against lightning or AC surges. There is no warranty for any connected equipment with this protector.

Q01L0043 REV. A



PROFESSIONAL



Safe pets. Happy owners.

Radio Fence Distributors
1133 Bal Harbor Blvd., Suite 1151
Punta Gorda, FL 34286

800-941-4200 • www.radiofence.com

©2002 Radio Fence Distributors. PetSafe is a US Trademark of Radio Fence Distributors.

Radio Fence Distributors, 1133 Bal Harbor Blvd., Suite 1151, Punta Gorda, FL 34286

INS7975 REV. B